

Revision

DATE: 1/27/05

REVISION: SLEEVE HEIGHT 2" ABOVE CAP.


DATE:

APPROVALS: Dave Redding



# STEEL PEDESTAL JUNCTION CABINET INSTALLATION

UGS

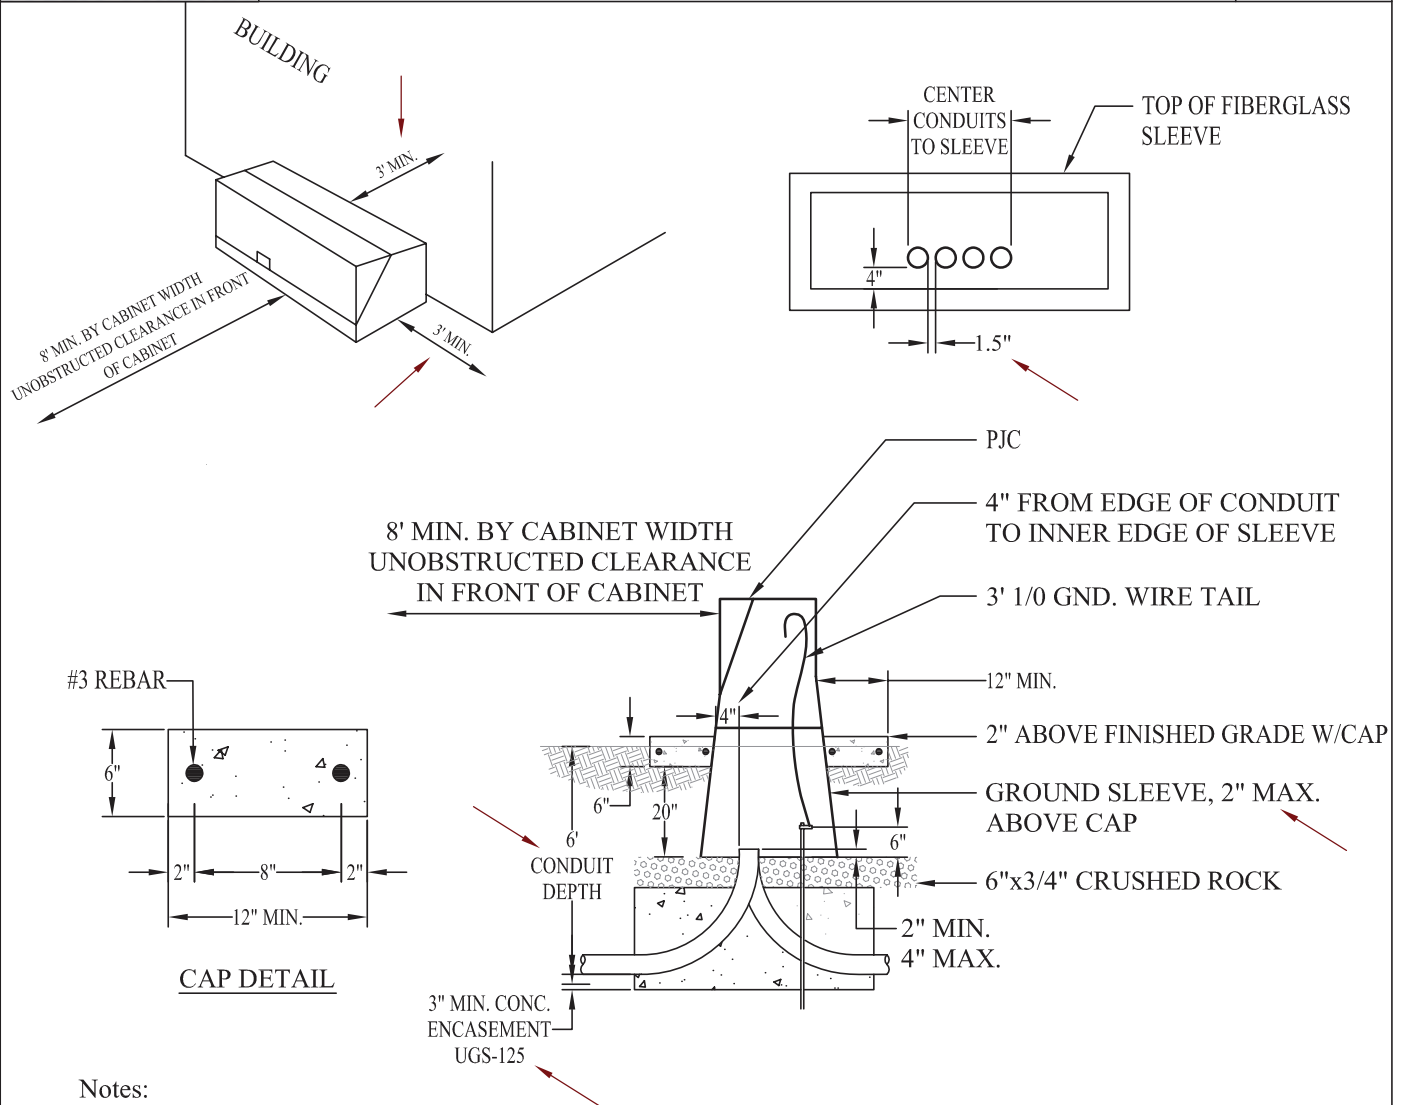

## Notes:

1. Conduits to be aligned in a row per Department Inspector's direction.
2. Group bond wire per UGS-621.1, 722, or 723.
3. PJC sleeve is provided by the Department and installed by the Developer.
4. Conduit sweeps shall be encased with concrete per UGS-125 and UGS-015 mix #4003.
5. The developer shall install a 12" min. Concrete cap, UGS-015 mix #4003, around the PJC. See detail above. →
6. No telecommunication conduit is to be installed in the PJC.
7. Barrier posts are required per UGS-290. →
8. For typical PJC locations see UGS-730.
9. Refer to UGS-225 for grounding.
10. Bracing of structure walls shall be required when backfilling.